

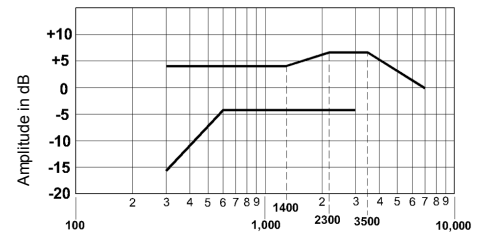
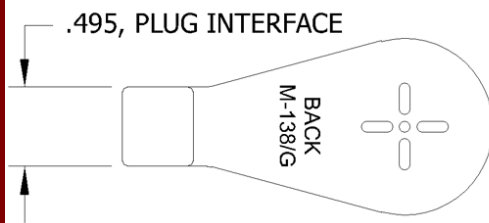


M-138()/G Dynamic Microphone

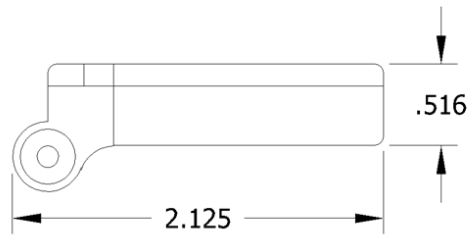

Part Number	Description
G01A012-PFK	Microphone with cable and boom assemblies
G01A007-PFK	Microphone element alone

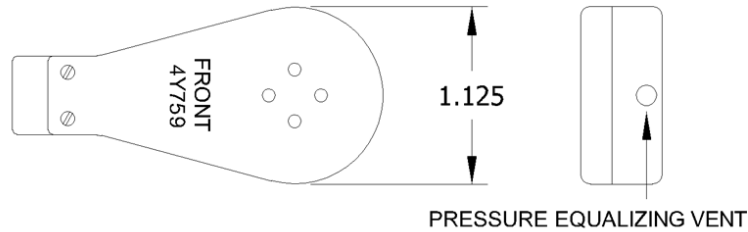

Frequency in Cycles per Second
FIG. 1

SPECIFICATION: MIL-PRF-26542/10

ELECTRO-ACOUSTIC CHARACTERISTICS

SENSITIVITY:

-56 dBm AT 1KHz WITH AN INPUT OF 28 DYNES/CM²

RESPONSE:

SEE ENVELOPE (FIG. 1)

IMPEDANCE:

150 OHM ± 15 OHM

DISTORTION:

6% MAX. FROM 300Hz TO 7KHz AT 114dB SPL

ACCUSONIC PRODUCTS

6 Washington Ave.
Bay Shore, NY 11706
USA

Tel 631-667-1000

Fax 631-667-1001

www.accusonicproducts.com

Picture is for illustration purposes only, actual product may vary