

LS-454

Encased Loudspeaker with Cable



Accusonic Products P/N
G03A006-PFD

COMPONENT		APPLICABLE SPEC
SPEAKER LS-445	G03A001-PFD	MIL-PRF-12606
CABLE	G07S001-OFO	MIL-C-3884
TRANSFORMER	G03A026-PFO	MIL-PRF-27 MIL-PRF-27/2

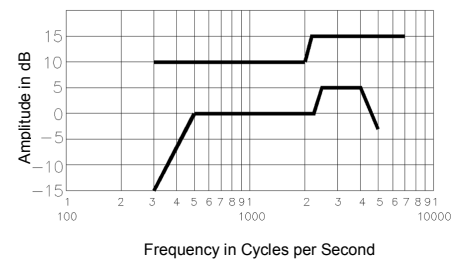
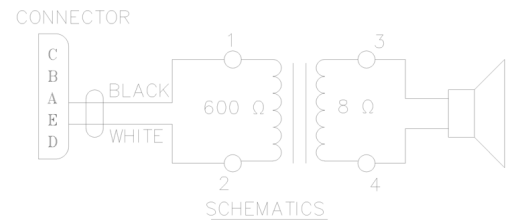
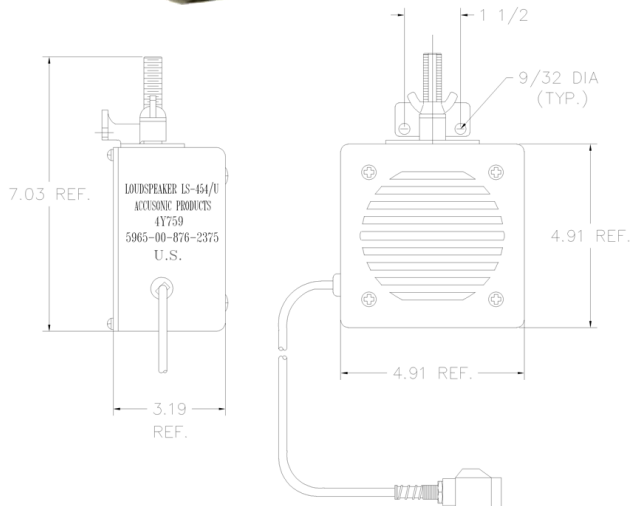


FIG. 1

SPECIFICATION: MIL-L-12632

ELECTRO-ACOUSTIC CHARACTERISTICS

SENSITIVITY:

95dB BETWEEN 750Hz AND 1250Hz 1KHz RE. 20μPa

RESPONSE: SEE ENVELOPE (FIG.1)

IMPEDANCE: 600 ± 60 OHM

DISTORTION:

5% MAX. AT 400Hz, 2000Hz AND 4000Hz WITH 34.6 ± 0.1 VOLTS APPLIED

ACCUSONIC PRODUCTS

6 Washington Ave.
Bay Shore, NY 11706

USA

Tel 631-667-1000

Fax 631-667-1001

www.accusonicproducts.com

Picture is for illustration purposes only, actual product may vary